


# Sopladoras

## Sopladoras de PET-Full Automática

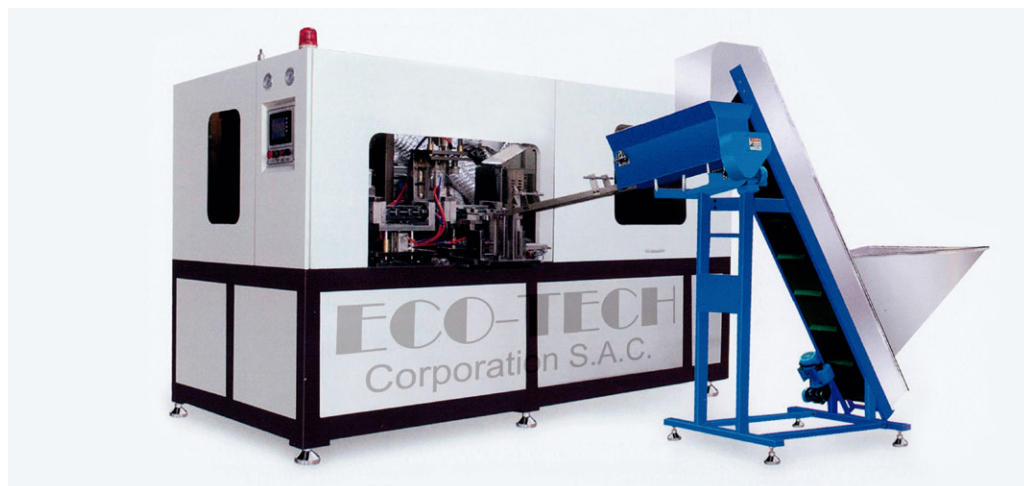

### Especificaciones Técnicas

ESPECIFICACIONES		UNIDAD	600-2	600-3	600-4	1500-2	1500-3	1500-4	5000	10000	1500-2	2000-2	1500-3	1500-4
BOTELLA	Número de cavidades	cavidad	2	3	4	2	3	4	1	1	2	2	3	4
	Capacidad de producción	pcs/hr	2400-2700	3000-3300	5500-6000	2400-2600	2800-3300	3800-4200	≥700	≥600	2200-2600	1700-2400	2800-3200	3800-4000
	Volúmen máx. de botella	L	0.6	0.6	0.6	1.5	1.5	1.5	5	10	1.5	2	1.5	1.5
	Diámetro de cuello	mm	65	65	65	80	80	80	45-80	45-80	38	38	38	38
	Diámetro máx. de botella	mm	65	65	65	105	105	105	180	220	90	105	90	105
	Altura máx. de botella	mm	230	230	230	300-330	300-330	300-330	350	400	330	330	330	330
SISTEMA ELÉCTRICO	Número de lámparas	pcs/hr	21	28	35	27	36	54	24	36	32	32	40	52
	Potencia de calentamiento	Kw	21	28	35	27	36	54	24	36	48	48	60	78
	Potencia de instalación	Kw	26	32	40	32	41	58	29	40	51	51	63	63
	Consumo de energía	Kw	14	18	22	18	22	35	18	28	15	16	20	24
SISTEMA DE AIRE	Presión de operación	Kg/cm <sup>2</sup>	7-9	7-9	7-9	7-9	7-9	7-9	7-9	7-9	7	7	7	7
	Consumo aire presión baja	Ltr/min	1000	1200	1600	1200	1400	2000	1200	1600	1000	1100	1400	2000
	Presión de soplado	Kg/cm <sup>2</sup>	25-35	25-35	25-35	25-35	25-35	25-35	25-35	25-35	≤40	≤40	≤40	≤40
	Consumo aire presión alta	Ltr/min	1500-2000	2000-2200	2200-2500	2000-2500	2000-3000	3000-3500	1200-1600	1600-2000	2000-2500	2000-2500	2000-3000	3000-3500
CHILLER	Presión de operación	Kg/cm <sup>2</sup>	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6
	Temperatura	°C	10	10	10	10	10	10	10	10	10	10	10	10
	Consumo	Kcal/hr	5600	5600	5600	5600	7600	7600	3600	5600	5600	5600	7600	7600
	Flujo	Ltr/min	30	30	30	30	45	45	20	30	30	30	45	45
MÁQUINA	Dimensión de máquina	m	2.3x1.5x1.7	2.7x1.5x1.7	3.0x1.5x1.7	2.4x1.5x1.7	2.7x1.5x1.7	3.0x1.5x1.7	4.2x2.0x2.0	4.3x2.0x2.0	2.8x1.65x2.0	3.0x1.7x2.0	3.1x1.7x2.0	2.1x1.9x2.0
	Peso de máquina	Ton	1.8	2.5	2.8	2.0	2.6	3.0	2.3	2.8	2.5	2.8	3.0	3.2